


HNF

28t-32t

叉车参数表

Technical Data

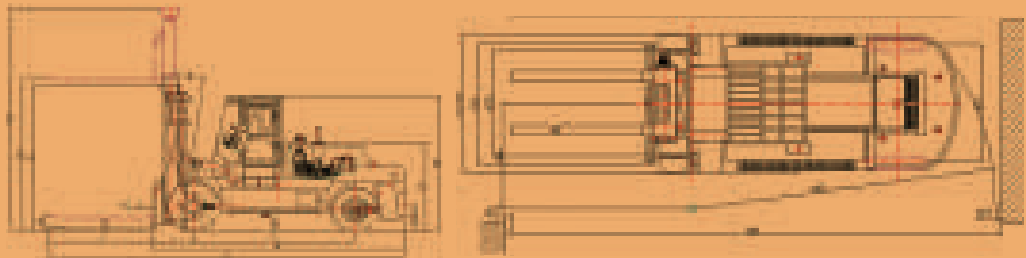

项目Item	项目内容	单位	设计值 Design details			
			HNF-280	HNF-300	HNF-300H	HNF-320
特性 Features	起重量/载荷 Rated Load	Q (t)	28	30	30	32
	载荷中心距 Load center	c (mm)	1250	1250	1250	1250
	轴距 Wheelbase	y (mm)	4800	4800	4800	4800
重量 Weight	自重 Weight	kg	39000	40000	45000	41000
车轮底盘 Chassis	轮胎规格: 前 Tyre Specs.:Front		14.00-24-32PR	14.00-24-32PR	16.00-25-32PR	14.00-24-32PR
	轮胎规格: 后 Tyre Specs.:Rear		14.00-24-32PR	14.00-24-32PR	16.00-25-32PR	14.00-24-32PR
	车轮, 数量前/后 (X-驱动轮) Tyres Qty,front/rear(X-drive wheels)		4\2	4\2	4\2	4\2
	轮距: 前 Wheel tread:Front	b10 (mm)	2420	2420	2800	2420
	轮距: 后 Wheel tread:Rear	b11 (mm)	2390	2390	2450	2390
基本尺寸 Dimension	门架/货叉架前/后倾角 Mast/carriage tilt angle(front/rear)	Degree (°)	6\12	6\12	3\4	6\12
	门架回缩时高度 Mast height(fork lowering)	h1 (mm)	3950	3950	3950	3950
	标准起升高度 Mast lifting height	h3 (mm)	3500	3500	8100	3500
	作业时最大高度 Max.lifting height	h4 (mm)	5700	5700	10520	5700
	护顶架高度 (驾驶室高度) Height to head guard(height to cab)	h6 (mm)	3800	3800	4750	3800
	总长 (含货叉长度) Overall length(with forks)	l1 (mm)	9590	9590	9590	9590
	货叉垂直前表面至车辆后端距离 Fork front vertical surface to the rear end of the vehicle	l2 (mm)	7150	7150	7500	7150
	总宽 Overall width	b1/b2 (mm)	3200	3200	3800	3200
	货叉尺寸 Fork dimension	s\e (mm)	2440X320X110	2440X320X110	2440X320X110	2440X320X110

项目Item	项目内容	单位	设计值 Design details			
			HNF-280	HNF-300	HNF-300H	HNF-320
基本尺寸 Dimension	货叉架宽度 Fork carriage width	b3 (mm)	3100	3100	3100	3100
	门架下最小离地间隙 满载 Mast min ground clearance(with load)	m1 (mm)	350	350	400	350
	轴距中心最小离地间隙 满载 Wheelbase center min ground clearance(with load)	m2 (mm)	410	410	460	410
	最小转弯半径 Min.Turning radius	Wa (mm)	7260	7260	7260	7260
	运行速度 (满载/无载) Travel speed(with load/without load)	km/h	24/28	24/28	25/28	24/28
功能参数 Performance	最大起升速度 (满载/无载) Max.lifting speed(with load/without load)	mm/s	260/280	260/280	260/280	260/280
	最大下降速度 (满载/无载) Max.Lowering speed(with load/without load)	mm/s	250/180	250/180	250/180	250/180
	牵引力 Traction	kN	220	220	220	220
	爬坡度 (满载/无载) Gradeability(with load/without load)	%	20/21	20/21	20/20	20/21
	行车制动 Driving brake		液压钳盘式 Hydraulic clamp disc	液压钳盘式 Hydraulic clamp disc	液压钳盘式 Hydraulic clamp disc	液压钳盘式 Hydraulic clamp disc
内燃机 Engine	内燃机生产厂家/型号 Engine brand/model	可选一 Optional one	潍柴 Weichai engine	潍柴 Weichai engine	潍柴 Weichai engine	潍柴 Weichai engine
			" WP10G240E341 9.726L 178kW 2200r/min"	" WP10G240E341 9.726L 178kW 2200r/min"	" WP10G240E341 9.726L 178kW 2200r/min"	" WP10G240E341 9.726L 178kW 2200r/min"
		可选二 Optional two	东康 Dongfeng Cummins	东康 Dongfeng Cummins	东康 Dongfeng Cummins	东康 Dongfeng Cummins
			" QSC8.3-C260 8.3L 194kW 2200r/min"	" QSC8.3-C260 8.3L 194kW 2200r/min"	" QSC8.3-C260 8.3L 194kW 2200r/min"	" QSC8.3-C260 8.3L 194kW 2200r/min"
		可选三 Optional three	液化天然气 LNG WP10G260E31NG 194kW 2200r/min	液化天然气 LNG WP10G260E31NG 194kW 2200r/min	液化天然气 LNG WP10G260E31NG 194kW 2200r/min	液化天然气 LNG WP10G260E31NG 194kW 2200r/min
		气缸数目 Cylinder No.	6	6	6	6
其他 Others	变速箱档位数 (前/后) Transmission gears(Front/rear)		2\1	2\1	2\1	2\1
	属具工作压力 Attachments working pressure	MPa	18	18	18	18
	属具用的油量 Attachments using oil amount	L/min	80	80	80	80

注: 由于技术改进, 该数据可能与产品不符, 如有差异请以产品为准
Note:the above date are subject to change without prior notice.